

Wall mount fiber distribution unit designed to support patching and splicing in one unit. The enclosure has 2 adapter panel positions allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations and has a single outer door with optional key lock.

Applications



- Telecommunications closets
- Remote distribution terminals

Features

- Available with adapters, splice trays and pigtails
- Single door with optional key lock available
- Top or bottom cable entry
- Cable entry tie down points
- Made in USA

Specifications

Property	Value
Adapter Plates	2
Splice Trays	4
Dimensions	9.5"H x 13"W x 3.5"D
Packaging	10"H x 14"W x 4"D
Weight	7 lbs empty, 10 lbs typical loaded
Material	18 GA Steel, Black powder coat

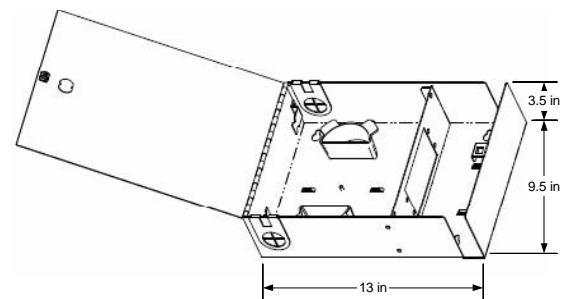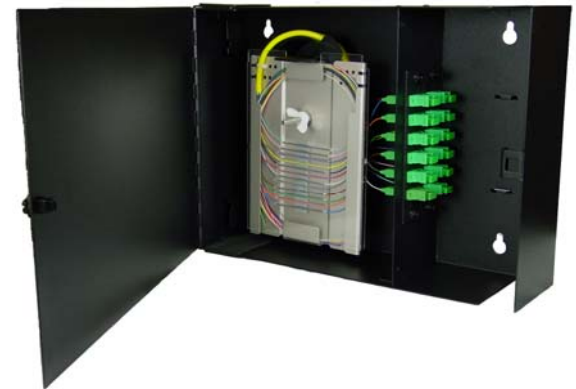

Ordering Information

Model #	Description
WM2PBF	WALLMOUNT PATCH PANEL EMPTY 2 LGX ADAPTER PLATE CAPACITY
WM-BKT-TRAY	SPLICE TRAY MOUNTING BRACKET 4 TRAY CAPACITY
TRAY7	SPLICE TRAY 7 INCH 12 FIBER SINGLE FUSION
LG1-xxxxxx-B	LG1 SERIES ADAPTER PLATES IN BLACK (SEE LG1 PRODUCT GUIDE)

Factory Loading Options:

